

# LED WALL CYLINDER WS11



## Features

- Die-cast aluminum housing for durability and heat dissipation.
- Adjustable color temperature and wattage for versatility.
- Long lifespan of 50,000 hours at 40°C.



## Technical specification

Model Number	WS11		
Input Voltage	120-277VAC		
CRI	>80		
Power Factor	>0.9		
THD	<20%		
Ambient Operating Temp.	-40~40°C		
Surge Protection	2KV included (4KV Optional)		
Control	Photocontrol (optional)		
Beam Angle	100°		
Wattage (Selectable)	50%,75%,100%		
Efficacy	Up to 136lm/w		
Color Temperature (Selectable)	3000K	4000K	5000K
WM11-21W	2642lm	2860lm	2764lm


• All values are nominal with  $\pm 10\%$  tolerance.

## Applications


- Commercial Areas
- Entrances & Doorways
- Restaurants
- Building Exteriors and Facades
- Storefronts



## Dimensions

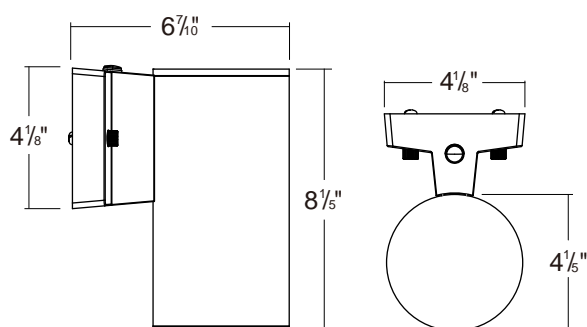

## Photometrics

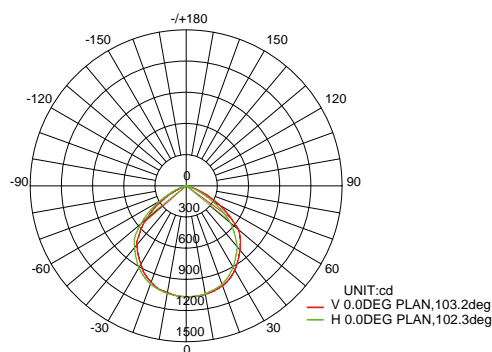

Average beam angle(50%): 102.7°