LED FLOOD





Technical specification

| Model Number | LF02 |
|-------------------------|----------------------|
| Input Voltage | 120V |
| CRI | >70 |
| Power Factor | >0.9 |
| THD | <20% |
| Ambient Operating Temp. | -40~40°C |
| Surge Protection | 2.5KV |
| Control | Photocell (optional) |
| Efficacy | 137lm/w |
| Color Temperature | 4000K or 5000k |
| Wattage | 12W(1650lm) |
| | |

 \star All values are nominal with \pm 10% tolerance.

Features

- Die-cast aluminum housing for durability and heat dissipation.
- Impact and tempered glass lens is precisely designed for optimal light distribution and efficiency.
- Long lifespan of 50,000 hours at 40°C.



Accessories




Mounting Canopy

Applications

- Commercial Areas
- Parking Lots & Garages
 Inc
- Security Lighting
- Entrances & Doorways
- Industrial Facilities
- Pathways & Perimeters



Dimensions

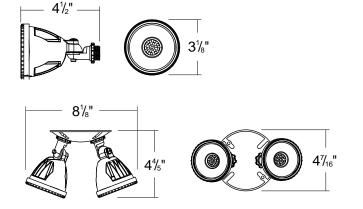

Photometrics

