



Features

- Die-cast aluminum housing for durability and heat dissipation.
- Impact and tempered glass lens is precisely designed for optimal light distribution and efficiency.
- Long lifespan of 50,000 hours at 40°C.



Accessories



Mounting Canopy

Yoke

Knuckle

Technical specification

Model Number	LF33R
Input Voltage	120V
CRI	>70
Power Factor	>0.9
THD	<20%
Ambient Operating Temp.	-40~40°C
Surge Protection	2.5KV
Efficacy	Up to 113lm/w
Color Temperature	4000K or 5000k
Wattage	25W(2473lm)
	39W(4434lm)


• All values are nominal with ± 10% tolerance.

Applications

- Commercial Areas
- Entrances & Doorways
- Parking Lots & Garages
- Industrial Facilities
- Security Lighting
- Pathways & Perimeters



Dimensions

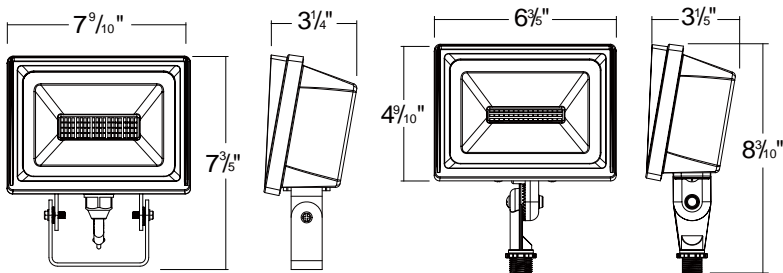

Photometrics

