

LED FLOOD LF35R



Features

- Die-cast aluminum housing for durability and heat dissipation.
- Impact and tempered glass lens is precisely designed for optimal light distribution and efficiency.
- Long lifespan of 50,000 hours at 40°C.



Accessories



Mounting Canopy

Yoke

Knuckle

Technical specification

| | |
|-------------------------|----------------|
| Model Number | LF35R |
| Input Voltage | 120V |
| CRI | >70 |
| Power Factor | >0.9 |
| THD | <20% |
| Ambient Operating Temp. | -40~40°C |
| Surge Protection | 2.5KV |
| Efficacy | 101lm/w |
| Color Temperature | 4000K or 5000K |
| Wattage | 66W(6706lm) |


• All values are nominal with $\pm 10\%$ tolerance.

Applications

- Commercial Areas
- Entrances & Doorways
- Parking Lots & Garages
- Industrial Facilities
- Security Lighting
- Pathways & Perimeters



Dimensions

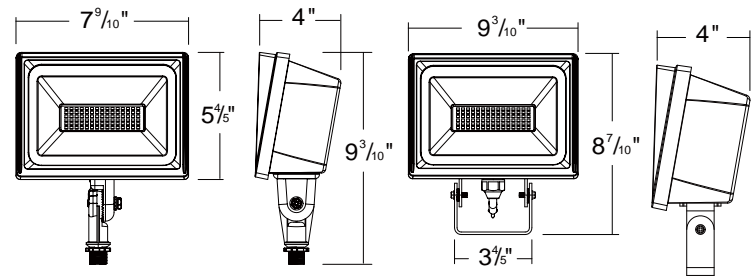

Photometrics

