

LED WALL MOUNT WM37



Technical specification

Model Number	WM37		
Input Voltage	120-277VAC		
CRI	>70		
Power Factor	>0.9		
THD	<20%		
Ambient Operating Temp.	-40~40°C		
Surge Protection	4KV		
Control	Photocontrol (Built in)		
Wattage (Selectable)	50%, 75%, 100%		
Efficacy	Up to 146lm/w		
Color Temperature (Selectable)	3000K	4000K	5000K
WM37-21W	2918lm	3195lm	3083lm

• All values are nominal with $\pm 10\%$ tolerance.

Features

- Die-cast aluminum housing for durability and heat dissipation.
- Integrated photocontrol for automatic dusk-to-dawn operation.
- Long lifespan of 50,000 hours at 40°C.




Applications

- Commercial Areas
- Entrances & Doorways
- Parking Lots & Garages
- Industrial Facilities
- Security Lighting
- Pathways & Perimeters



Dimensions

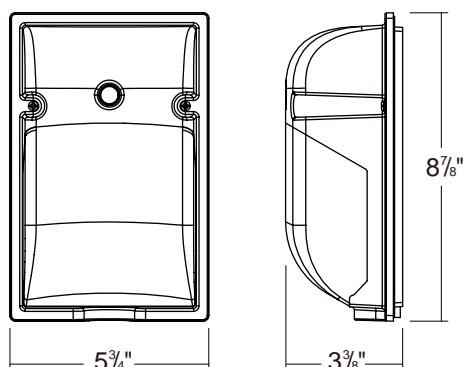

Photometrics

