

LED BARN WM60



Technical specification

Model Number	WM60
Input Voltage	120V
CRI	>70
Power Factor	>0.9
THD	<20%
Ambient Operating Temp.	-40~40°C
Surge Protection	2.5KV
Control	Photocontrol
Efficacy	Up to 144lm/w
Color Temperature	4000K or 5000K
Wattage	48W(6913lm)
	70W(9328lm)

• All values are nominal with $\pm 10\%$ tolerance.


Features

- Die-cast aluminum housing for durability and heat dissipation.
- Built in photocontrol for dusk to dawn.
- Long lifespan of 50,000 hours at 40°C.




Applications


- Barn
- Parking Lots & Garages
- Security Lighting
- Entrances & Doorways
- Industrial Facilities
- Pathways & Perimeters

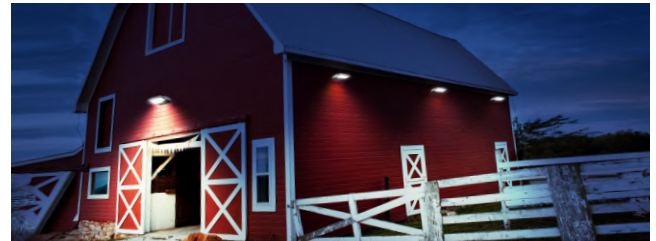

Dimensions

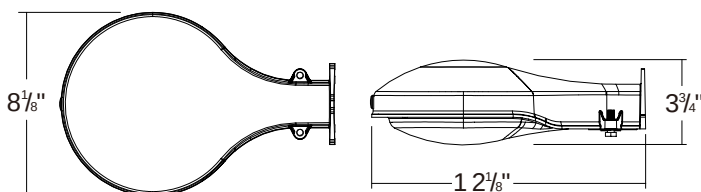

Photometrics

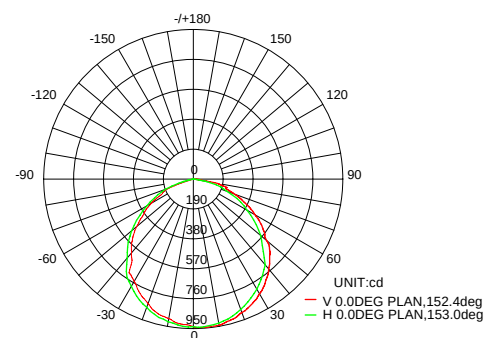

AVERAGE BEAM ANGLE(10%):152.7 DEG