

LED VAPOR TIGHT VP104R



Technical specification

Model Number	VP104R		
Input Voltage	120-277VAC		
CRI	>70		
Power Factor	>0.9		
THD	<20%		
Ambient Operating Temp.	-40~40°C		
Surge Protection	4KV		
Wattage (Selectable)	50%,75%,100%		
Efficacy	Up to 120lm/w		
Color Temperature (Selectable)	3000K	4000K	5000K
VP104R Glass-25W	2609lm	2945lm	2997lm
VP104R Frosted PC Lens-25W	2478lm	2797lm	2847lm

• All values are nominal with $\pm 10\%$ tolerance.


Features

- Die-cast aluminum housing for durability and heat dissipation.
- Adjustable color temperature and wattage for versatility.
- Long lifespan of 50,000 hours at 40°C.
- Various glass colors and types available.
- 1/2" threaded opening allows for conduit entry.




Applications

- Commercial Areas
- Entrances & Doorways
- Parking Lots & Garages
- Industrial Facilities
- Security Lighting
- Pathways & Perimeters

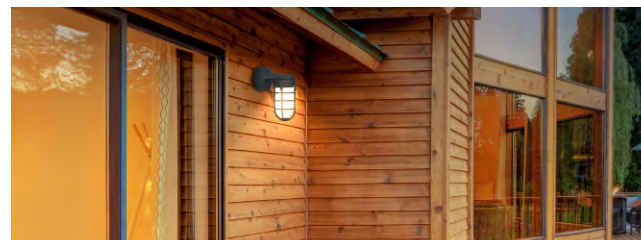

Dimensions

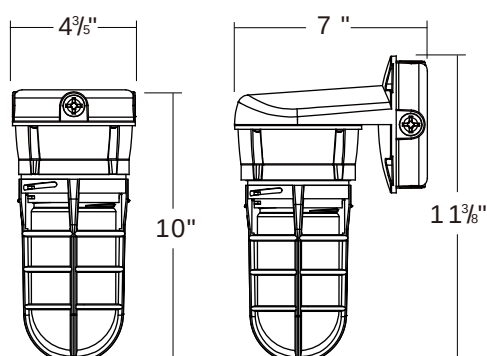

Photometrics

