

LED GOOSENECK

WM68



Features

- Die-cast aluminum housing for durability and heat dissipation.
- Adjustable color temperature and wattage for versatility.
- Integrated photocontrol for automatic dusk-to-dawn operation.
- Classic gooseneck design for a timeless appearance.
- Long lifespan of 50,000 hours at 40°C.



Technical specification

Model Number	WM68		
Input Voltage	120-277V		
CRI	>70		
Power Factor	>0.9		
THD	<20%		
Ambient Operating Temp.	-40~40°C		
Surge Protection	2KV (WM68-22W only)		
Control	Photocontrol (optional)		
Wattage (Selectable)	50%,75%,100%		
Efficacy	Up to 155lm/w		
Color Temperature (Selectable)	3000K	4000K	5000K
WM68-9W	1288lm	1403lm	1325lm
WM68-22W	3204lm	3399lm	3290lm


• All values are nominal with $\pm 10\%$ tolerance.

Applications

- Commercial Areas
- Entrances & Doorways
- Sign Lights
- Storefronts
- Restaurants




Dimensions

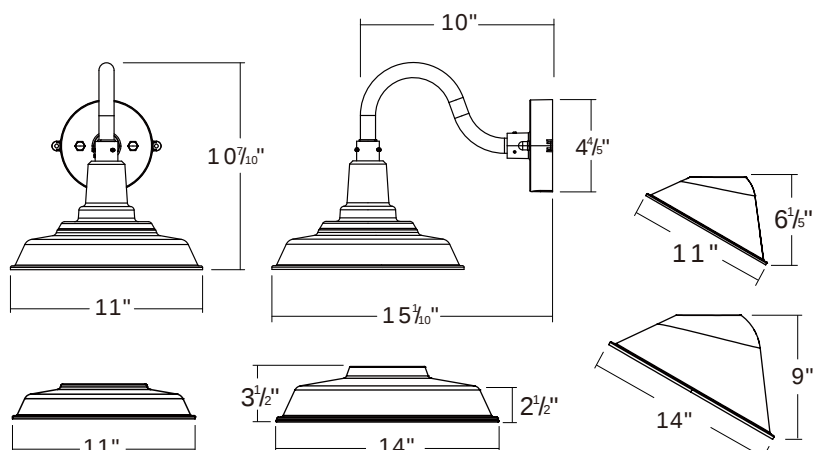

Straight shade

Angled corn shade

Photometrics

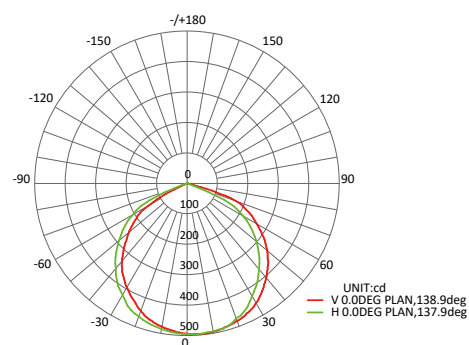

WM68 - 9W/1403lm