



Technical specification

Model Number	WS12		
Input Voltage	120-277VAC		
CRI	>70		
Power Factor	>0.9		
THD	<20%		
Ambient Operating Temp.	-40~40°C		
Surge Protection	2KV included (4KV Optional)		
Control	Photocontrol (optional)		
Beam Angle	70°/106°		
Wattage (Selectable)	50%,75%,100%		
Efficacy	Up to 151lm/w		
Color Temperature (Selectable)	3000K	4000K	5000K
WM12-20W	2822lm	3027lm	2987lm

• All values are nominal with ± 10% tolerance.

Features

- Die-cast aluminum housing for durability and heat dissipation.
- Adjustable color temperature and wattage for versatility.
- Three directional switch (Up/Down/Both)
- Long lifespan of 50,000 hours at 40°C.




Applications

- Commercial Areas
- Entrances & Doorways
- Restaurants
- Building Exteriors and Facades
- Storefronts



Dimensions

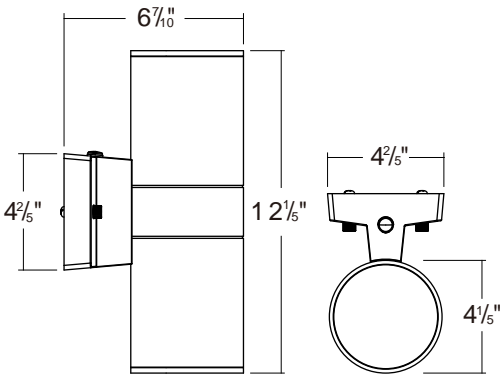

Photometrics

